



Seal-A-Ridge® Ridge Cap Shingles

Choose the perfect finishing touch for your new
GAF shingle roof with protective ridge cap shingles

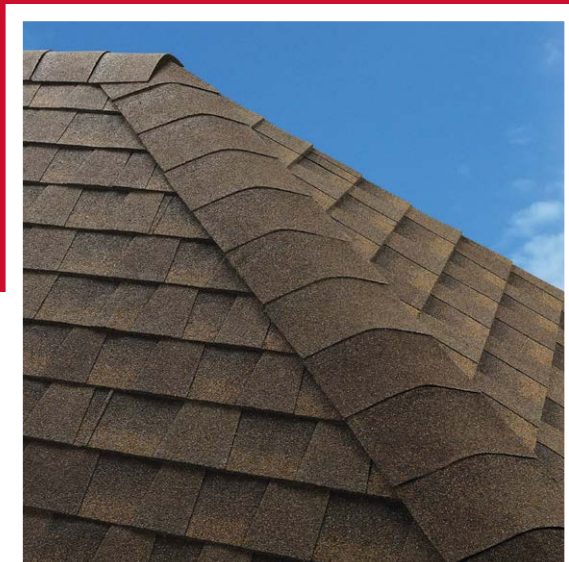

- Protects against leaks and shingle blow-off at your roof's hips and ridges
- Provides a high-quality and less labor-intensive alternative to using cut-up 3-tab strip shingles as your ridge cap
- An integral part of the GAF Lifetime Roofing System¹

Seal-A-Ridge® Ridge Cap Shingles

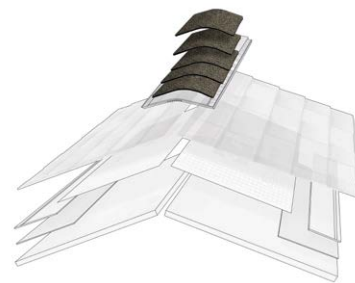

Benefits:

- **Manufactured by GAF to complement** the color of your GAF shingles (unlike typical cut-up 3-tab strip shingles)
- **Traditional look** provides a clean, finished touch on your new roof
- **Dura Grip™** Adhesive seals each piece tightly and reduces the risk of shingle blow-off
- **Machine-cut design** provides a cleaner finished look than cut-up 3-tab strip shingles
- **StainGuard® Protection** helps ensure the beauty of your ridge cap shingles against unsightly blue-green algae²
- **Eligible for up to a Lifetime limited warranty** when installed on Lifetime Shingle roofs.¹ They're also an eligible component of GAF residential enhanced warranties.
- **Pre-scored design** eliminates the need for time-consuming cuts

Also available:

Seal-A-Ridge® AS SBS-Modified IR Ridge Cap Shingles

- **Made with our proprietary SBS-modified asphalt** to help protect your home from extreme weather conditions. Seal-A-Ridge® AS SBS Modified IR Ridge Cap Shingles may also qualify for insurance discounts.³

Product Details:

Seal-A-Ridge® Ridge Cap Shingles Nominal Specifications:

- For use with GAF Timberline HD®, Timberline® HDZ™, Timberline® NS, Timberline® UHD, and Timberline® AH Shingles
- Fiberglass asphalt design
- 6 2/3" (169 mm) exposure
- Approx. 12" (305 mm) wide
- 4 bundles cover approx. 100 lineal feet (30 lm)
- Approx. 45 pieces per bundle

Code Approvals:

- UL Listed to ANSI/UL 790 Class A⁴
- Meets ASTM D3462⁵
- ASTM D3018 Type 1
- ASTM D3161 Class F
- ICC-ES ESR-1475 and ICC-ES ESR-3267
- Miami-Dade County Product Control Approved
- State of Florida approved
- CSA A123.5

Seal-A-Ridge® AS SBS-Modified IR Cap Shingles Nominal Specifications:

- For use with GAF Timberline® AS, Grand Sequoia® AS, and Glenwood® Shingles
- SBS-modified asphalt design
- Passes UL 2218 Class 4 (highest rating)
- 5" (127 mm) exposure
- Approx. 12" (305 mm) wide
- 4 bundles cover approx. 100 lineal ft.
- Approx. 60 pieces per bundle

Code Approvals:

- UL Listed to ANSI/UL 790 Class A⁴
- UL 2218 Class 4
- Meets ASTM D3462⁵
- ASTM D3018 Type 1
- ASTM D3161 Class A
- ASTM D3161 Class F⁶
- ICC-ES ESR-1475 and ICC-ES ESR-3267
- State of Florida approved
- CSA A123.5

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and any 3 qualifying GAF Accessories. See *GAF Roofing System Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. For installations not eligible for the GAF Roofing System Limited Warranty, see the *GAF Shingle & Accessory Limited Warranty*.

² StainGuard® algae protection is available only on shingles sold in packages bearing the StainGuard® logo. Products with StainGuard® algae protection are covered by a 10-year limited warranty against blue-green algae discoloration. See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions.

³ May qualify for insurance discounts when used with certain GAF shingles. See specifications for details. Insurance discounts may not be available in your area. Where available, insurance discounts may vary. Contact your insurance provider for information.

⁴ Refer to UL Online Certification Directory for actual assemblies.

⁵ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

⁶ With sealant applied as specified in manufacturer's installation instructions for maximum wind speed coverage.

Note: See gaf.com/ridgecapavailability for regional availability



To learn more about the Lifetime Roofing System visit gaf.com/Lifetime



We protect what matters most™

